



FIBREGLASS DOORS



RAWJI EXPORTS

Survey No 139, Paiki , Opp. Holy Merry High School,
Village Rehnal , Bhiwandi, Dist. Thane 421 302.Maharashtra.

Phone : +91 8669997712 | 8669997713

Email : salesfg@rawji.com | kumar@rawji.com

Website: www.rawji.com



DOOR DESIGNS



Plain
Smooth Finish



Plain
Leather Finish



Plain
Woodgrain Finish



Single Panel Arch
Woodgrain Panel



Single Panel Square
Woodgrain Panel



2 Panel
Woodgrain Finish



2 Panel Arch
Woodgrain Finish



3 Panel Arch
Woodgrain Finish



3 Panel Square
Woodgrain Finish



4 Panel
Woodgrain Finish



4 Panel Arch
Woodgrain Finish





6 Panel
Woodgrain Finish



Doors with Glass



PANEL DETAILS

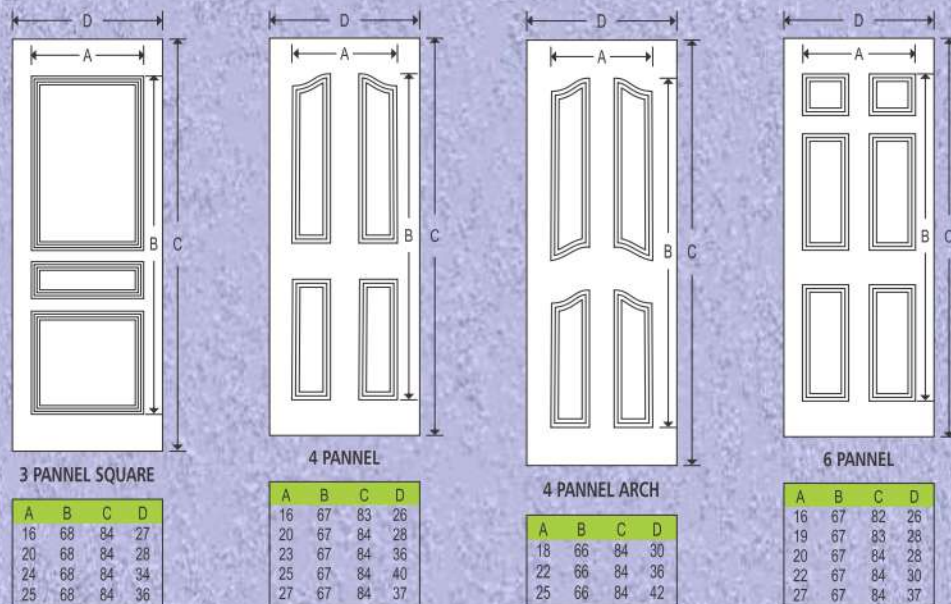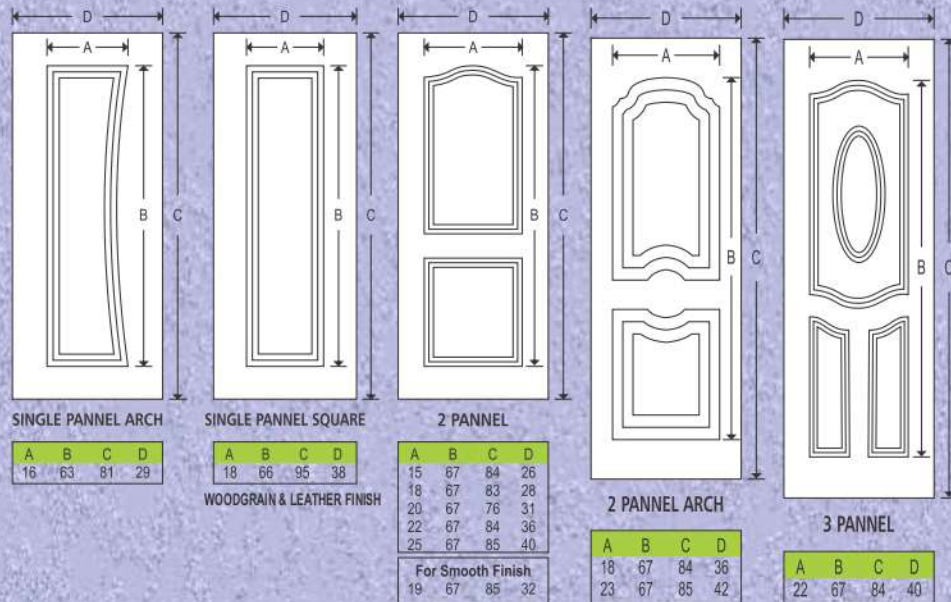


	Max Length	Max Width
PLAIN SMOOTH	96	48
PLAIN LEATHER	96	48
PLAIN GRAIN	96	48

** all sizes are in inches

FRP Door Frame



Cross Section View

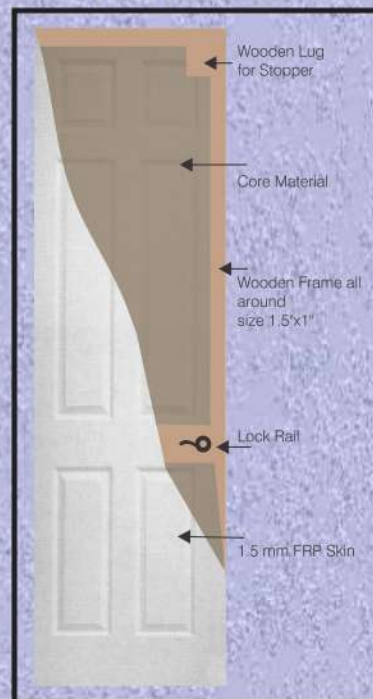

SOLID COLOURS



VENEER COLOURS



Leather / Mat Finish



Woodgrain Finish

SPECIFICATIONS FOR FRP DOORS

- 1.5mm thick F.R.P. Skin is moulded with the Core Material forming a Sandwich Pannel. Necessary wooden supports are provided for fixing the Handles, Locks, Stoppers and other accessories.
- The door is Self-Pigmented and available in colour of your choice. Also available in veneer finish.
- Doors available in smooth / mat / veneer finish.
- The standard door thickness is 30/35 mm.
- Doors also available with fire retardant properties.

ADVANTAGES FOR FRP DOORS

- The fixing is simple as conventional Wooden Doors and can be fixed on any door frame.
- The doors are free from swelling, warping or splitting & have good impact resistance.
- The doors have no effect of water, insects or termites and have excellent weathering properties.
- F.R.P. doors have a significantly lower coefficient of thermal expansion compared to Wooden Doors, allowing doors and frames to be manufactured to a tight tolerance.